



LUXAFLEX® ROLLER BLIND STANDARD

A high quality and durable roller blind system, developed to fit small up to very large windows. The blinds are made to measure and available in six different models. Discrete side brackets, mounting profile for easy mounting, cassettes for room darkening or skylight blinds. Multiple operations and different finishing options are available to create your own unique blind. Great fabric collection to choose from; screen for view through and heat regulation, opaque qualities for privacy and black out/dim out qualities that blocks light.



TECHNICAL INFORMATION

Models	6
Max width	3500 mm (1200 mm Skylight)
Max height	4000 mm (1400 mm Skylight)
Max surface	12 sqm

Maximum dimensions are depending on chosen model and fabric.

General


Extruded strong aluminium tubes in four different dimensions; 31, 37, 50 and 62 mm depending on width. Fabric is attached with tape.

Mounting

All models are possible to mount on wall or in ceiling. Side brackets are also possible to mount sideways in recess. Wired side guiding is optional (model 10 and 20).



Brackets



Wired side guiding

Finishing options of the blind



Sewn channel with covered bottom weight



Finishing Round 122



Finishing Oval 124 (std)



Finishing Oval 124 XL



Finishing Stadium 600



Operation

- Chain: white, black or grey operation. Plastic chain is standard, steel is optional.
- LiteRise®: unique stepless operation that operates the blind with just a pull or push the blind up or down. Always with mounting profile or cassette.
- SoftRaise®: unique operation, with just a light pull downwards the blind will move up automatically. Always with mounting profile or cassette.
- 18V, 24 V DC or 230 V AC motor and PowerView®: integrated in the tube. Suitable with different control systems like radio, KNX, IB or wired solutions. Compatibility depending on chosen motor.





Chain operation




LiteRise® operation

Models/Sketches


10 Bracket, classic roller blind with coloured steel brackets on the side and plastic cover.

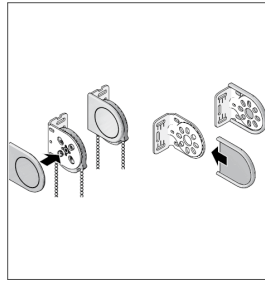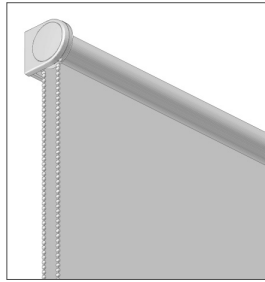

Brackets with plastic cover cap.

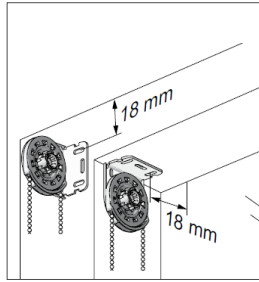


Mounting options: on face wall, in ceiling or in the side of the recess.

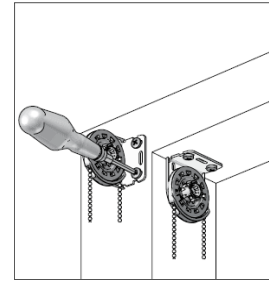


Bracket 33/38/46/55 mm distance. Note: the roll and operation can build outside the measures.


20 Mounting profile, quick and easy mounting of the roller blind.

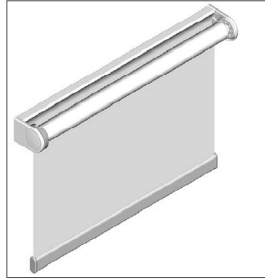


RAL-codes for metal parts: white 9016, black 9005, grey 9006.

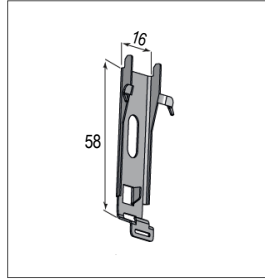

Metal clips in aluminium.

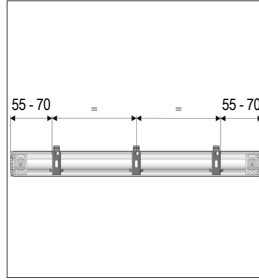


Distance between brackets.

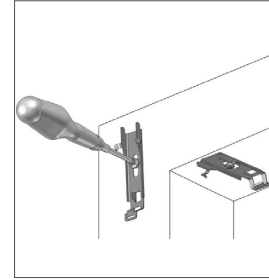


On face wall mount or ceiling mount. Note: the roll and operation will build outside the measures.


S1 Cassette, for room darkening with optional 35 mm side channels with brush and bottom profile.

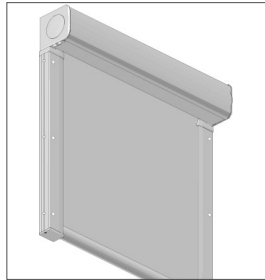


RAL-codes for metal parts: white 9016, black 9005, grey 9006.

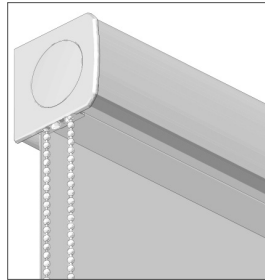

Closed cassette for room darkening. Open cassette is also possible.

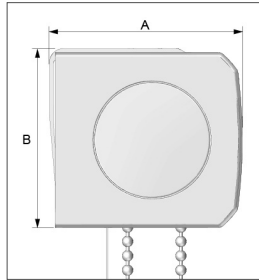


Dimensions A: 72 mm, B: 68 mm.

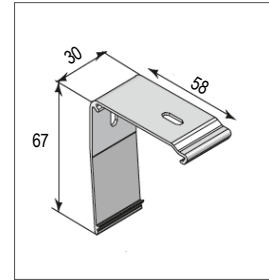


Bracket, on wall or in ceiling.


S2/S3 Cassette, for room darkening with optional 35 or 64 mm side channels with brush and bottom profile.

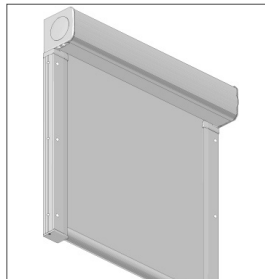


RAL-codes for metal parts: white 9016, black 9005, grey 9006.

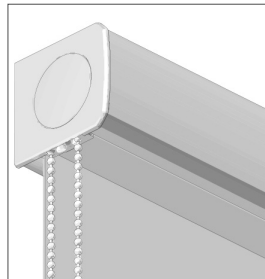

Closed cassette for room darkening. Open cassette is also possible.

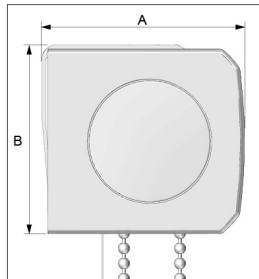

S2: Dimensions A: 89 mm, B: 80 mm. S3: Dimensions A: 100 mm, B: 98 mm.

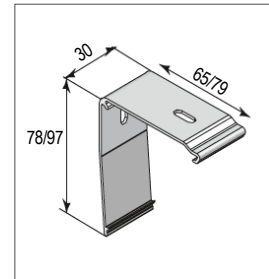


S2/S3 bracket, on wall or in ceiling.


9 Skylight, for roof windows, always with side channels and manual operation by hand or optional rod.



RAL-codes for metal parts: white 9016 or grey 9006

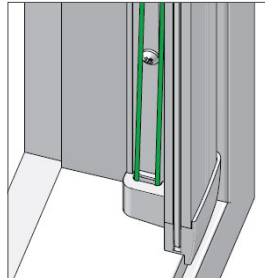

Side channel W: 32 mm

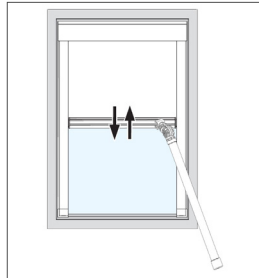

Rod operation

GLARE & REFLECTION CONTROL

Fabrics

Multiple fabrics with different functions and designs for every room.


- Room darkening, for rooms that is in need of light block.
- Opaque fabrics, for privacy and sun protection.
- Screen fabric, for nice view through, heat regulation and to prevent glare.

Examples:

Verosol EnviroScreen, 2% openness factor. Screen fabric with aluminium back side that reflects 74% of solar energy. Environmentally certified.

Verosol SilverScreen, 2%, 3% or 4% openness factor. Screen fabric with aluminium back side that reflects up to 85% of solar energy.

See collection book or Luxaflexproject.se for more information and technical specification.

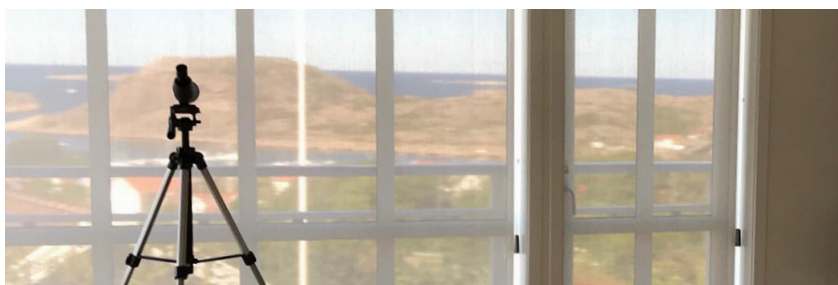

Verosol SilverScreen

CONTACT US

Showrooms in Sweden

Our two showrooms are located in Stockholm and Gothenburg. Please see below the contact persons for each location.

Etage 1 Stockholm

Rosenlundsgatan 40
www.etage1.se

Contact: Calle Kihlman
+46 (0)739-44 14 67
calle.kihlman@luxaflex.se

Studio L6 Göteborg

Lasarettsgatan 6
www.studiol6.se

Contact: Pernilla Norberg
+46 (0)708-16 62 91
pernilla.norberg@luxaflex.se

Our customer service in each country are more than happy to help you with any product question:

Sweden

Phone: +46 (0)371-895 00
E-mail: projektoffert@luxaflex.se
www.luxaflexproject.se

Denmark

Phone: +45 86 17 93 77
E-mail: projekt@luxaflex.dk
www.luxaflexproject.dk

Norway

Phone: +47 23 17 33 00
E-mail: prosjekt@luxaflex.no
www.luxaflexproject.no

